



# Chimei-Innolux Corporation

## **BT140GW03 V.X LCD MODULE SPECIFICATION**

(●) Preliminary Specification

( ) Final Specification

Customer	Checked & Approved by

Approved by	Checked by	Prepared by
MKT	PD	PM
		Monica Huang

Date: 2010/04/15

## **Chimei-Innolux Corporation**

No.160 Kesyue Rd., Chu-Nan Site, Hsinchu Science Park,

Chu-Nan 350, Miao-Li County, Taiwan

Tel: 886-37-586000

Fax: 886-37-586060



Version: 2

Chimei-Innolux copyright  
All rights reserved,  
Copying forbidden.

## Record of Revision

Version	Revise Date	Page	Content
0	2010/03/31	All	First Edition issued
1	2010/04/08	5	Pin Assignment
		8	Table a
		11	Power Sequence Timing Table
		14	Backlight Driving Condition
2	2010/04/15	5	Panel Connector
		8	Typical operating conditions



SPEC NO. BT140GW03 V.X

PAGE

3/26

<b>Contents:</b>	<b>Page</b>
<b>1. General Specifications</b>	<b>2</b>
<b>2. Electrical Specifications</b>	
2-1 Pin Assignment	<b>3</b>
2-2 Absolute Maximum Ratings	<b>5</b>
2-3 Electrical Characteristics	<b>6</b>
<b>3. Optical Specifications</b>	<b>12</b>
<b>4. Reliability Test Items</b>	<b>15</b>
<b>5. Safety</b>	<b>16</b>
<b>6. Display Quality</b>	<b>16</b>
<b>7. Handling Precaution</b>	<b>16</b>
<b>8. Label Definition</b>	<b>18</b>
<b>9. Packing Form</b>	<b>19</b>
<b>10. Mechanical Drawings</b>	<b>21</b>
<b>Appendix</b>	<b>23</b>



SPEC NO. BT140GW03 V.X

PAGE

4/26

## 1. General Specifications

NO.	Item	Specification	Unit
1	Display resolution (pixel)	1366(H) X 768(V), HD resolution	
2	Active area	309.40(H) X 173.95(V)	mm
3	Screen size	14.0 inches diagonal	Inches
4	Pixel pitch	0.2265(H) X 0.2265(V)	mm
5	Color configuration	Stripe	
6	Overall dimension	320.9(W) X 199.1(H) X 3.6(D) (max)	mm
7	Weight	320Max.	Grams
8	Surface treatment	Glare, 3H	
9	Input color signal	6 bit LVDS	
10	Display colors	262K (6 bit)	
11	Optimum viewing direction	6 o'clock	
12	Backlight	W-LED	
13	RoHS	RoHS compliance	



## 2. Electrical Specifications

### 2-1 Pin Assignment

#### a. Panel connector

Connector Part No: GS13401-1110S-7H (Foxconn )

User's connector Part No: 20453-040T-12 (I-PEX) or equivalent

Pin No	Symbol	Description	Remark
1	NC	No connection (Reserve)	
2	V <sub>CC</sub>	Power Supply (+3.3V)	
3	V <sub>CC</sub>	Power Supply (+3.3V)	
4	V <sub>EDID</sub>	DDC Power +3.3V	
5	NC	No connection (Reserve)	
6	Clk <sub>EDID</sub>	DDC Clock	
7	DATA <sub>EDID</sub>	DDC Data	
8	Rxin0-	Differential Data Input	R0~R5,G0
9	Rxin0+	Differential Data Input	
10	GND	Ground	
11	Rxin1-	Differential Data Input	G1~G5,B0,B1
12	Rxin1+	Differential Data Input	
13	GND	Ground	
14	Rxin2-	Differential Data Input	B2~B5,DE,Hsync,Vsync
15	Rxin2+	Differential Data Input	
16	GND	Ground	
17	CLK-	Differential Clock Input	
18	CLK+	Differential Clock Input	
19	NC	No connection (Reserve)	
20	NC	No connection (Reserve)	
21	NC	No connection (Reserve)	
22	GND	Ground	
23	NC	No connection (Reserve)	
24	NC	No connection (Reserve)	
25	GND	Ground	
26	NC	No connection (Reserve)	
27	NC	No connection (Reserve)	
28	GND	Ground	
29	NC	No connection (Reserve)	
30	NC	No connection (Reserve)	
31	LED_GND	LED Ground	
32	LED_GND	LED Ground	
33	LED_GND	LED Ground	
34	NC	No connection (Reserve)	
35	LED_PWM	PWM dimming signal input	
36	LED_EN	LED enable pin (3.3V)	
37	NC	No connection (Reserve)	
38	V_LED	LED power supply 6.0V~21V	
39	V_LED	LED power supply 6.0V~21V	
40	V_LED	LED power supply 6.0V~21V	

SPEC NO. BT140GW03 V.X



PAGE

6/26

## b. General Block Diagram (Rear Side)



Connector P/N :  
GS13401-1110S-7H

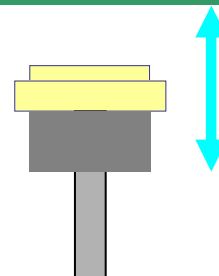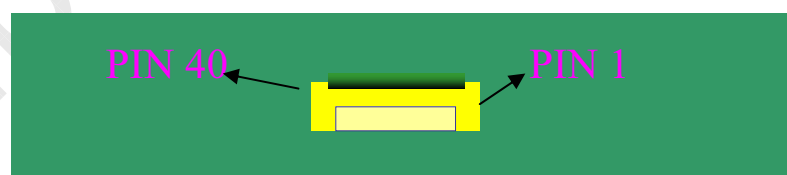




## 2-2. Absolute Maximum Ratings

Parameter	Symbol	Values		Unit	Remark
		Min.	Max.		
Power input voltage	$V_{CC}$	- 0.3	4.0	V	At 25°C
Signal input voltage	$V_{IN}$	- 0.3	4.0	V	At 25°C
Operating temperature	$T_{OP}$	0	50	°C	Note 1
Storage temperature	$T_{ST}$	- 20	60	°C	Note 2

Note 1: The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less.  
At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C.

Note 2: The unit should not be exposed to corrosive chemicals.

### Relative Humidity (%RH)

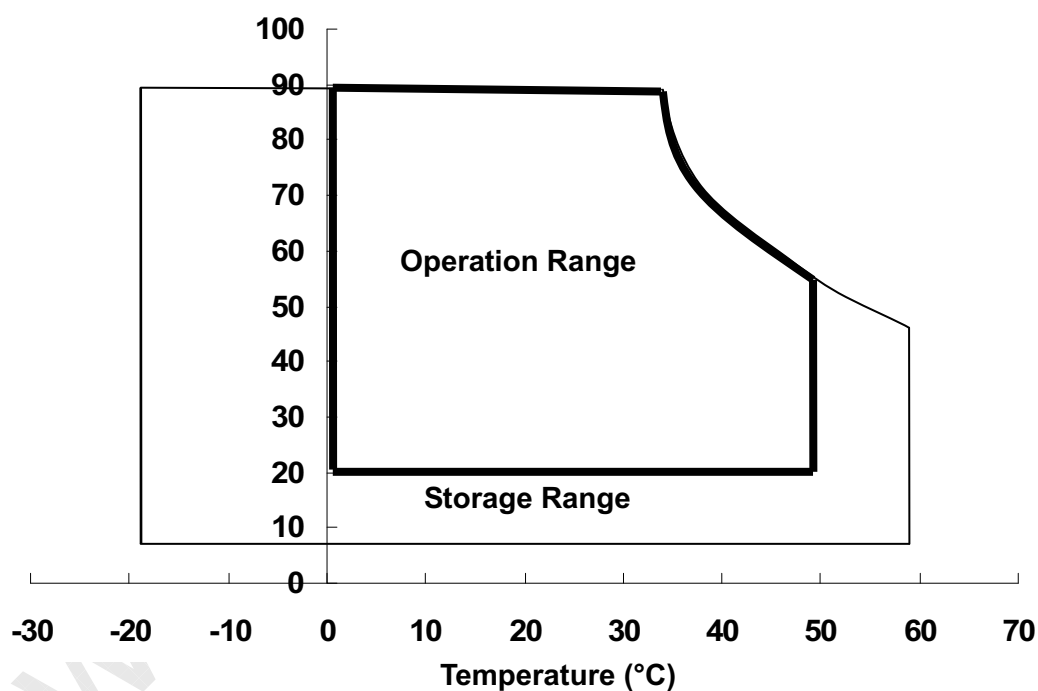

SPEC NO. BT140GW03 V.X

PAGE

8/26

**2-3. Electrical Characteristics**

## a. Typical operating conditions


Item		Symbol	Min.	Typ.	Max.	Unit	Remark
Power input voltage		$V_{CC}$	3	3.3	3.6	V	
Permissive power input ripple		$V_{RF}$	-	-	0.1	V	
Power input current		$I_{CC}$	-	260	300	mA	Note 1
Power consumption		$P_C$	-	-	1	Watts	Note 1
LVDS interface	Differential input high threshold voltage	$V_{LVTH}$	-	-	+100	mV	$V_{LVC}=1.2V$ , Note 2
	Differential input low threshold voltage	$V_{LVTL}$	-100	-	-	mV	$V_{LVC}=1.2V$ , Note 2
	Common input voltage	$V_{LVC}$	1.0	1.2	1.4	V	Note 2
	Terminating resistor	$R_T$	90	100	110	ohm	
Rush current		$I_{Rush}$	-	-	1.5	A	Note 3
LED rush current		$I_{LED-Rush}$	-	-	3.0	A	Note 4

Note 1: The specified input current and power consumption are under the  $V_{CC}=3.3V$ ,  $25^{\circ}C$ ,  $f_v=60Hz$  (frame frequency) condition whereas mosaic pattern is displayed.

Note 2: LVDS waveform diagram

Rxin+/CLK+

Rxin-/CLK-

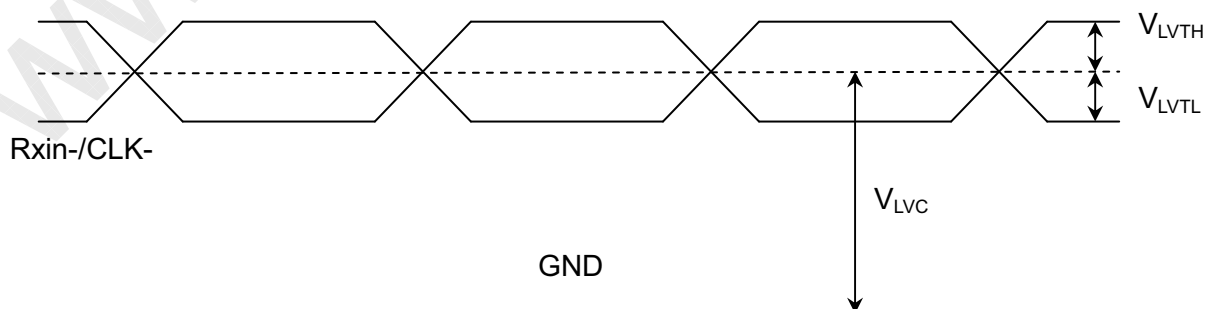


SPEC NO. BT140GW03 V.X

PAGE


9/26

## Note 3: Test condition

(1) Pattern: Black pattern

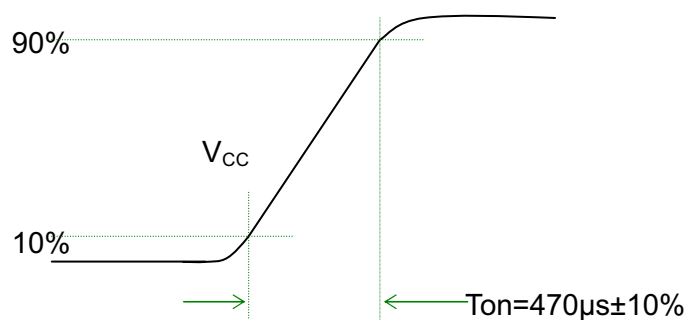(2)  $V_{CC} = 3.3\text{ V}$ ,  $V_{CC}$  rising time =  $470\text{ }\mu\text{s} \pm 10\%$ 

## (3) Test circuit

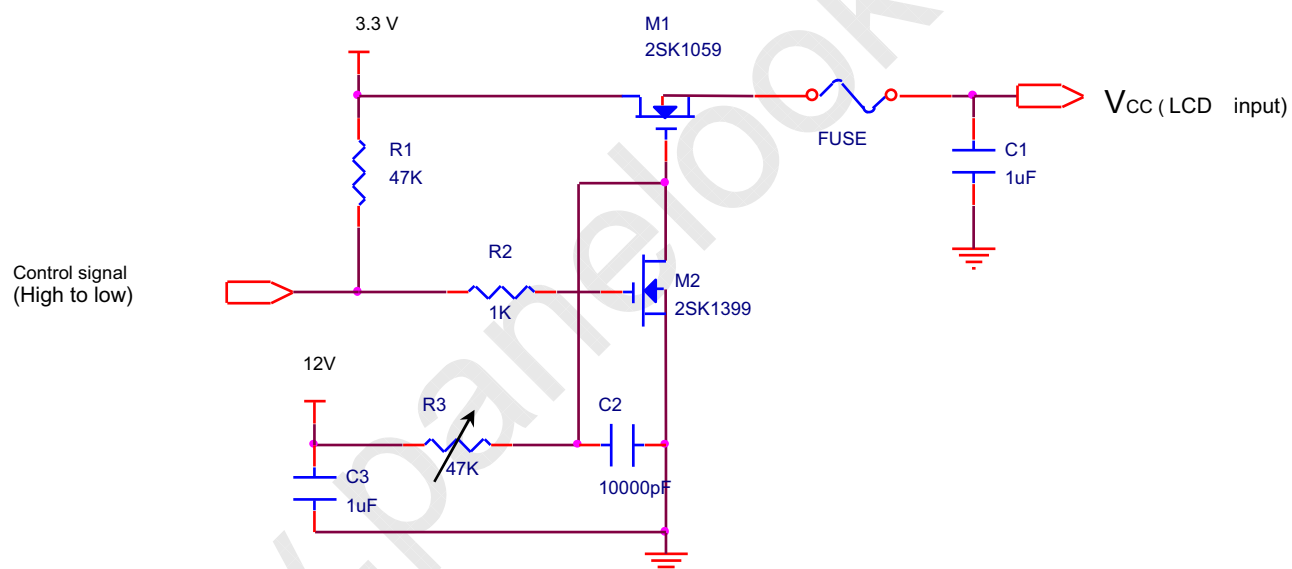


SPEC NO. BT140GW03 V.X

PAGE


10/26

Note 4: Test condition

(1) Pattern: LED duty 100%

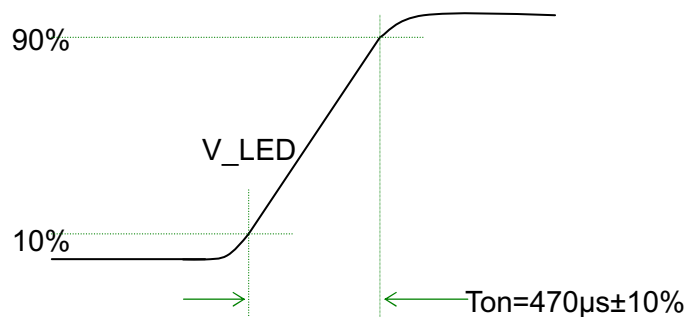(2)  $V_{LED} = 12.0V$ ,  $V_{LED}$  rising time =  $470 \mu s \pm 10\%$ 

(3) Test circuit

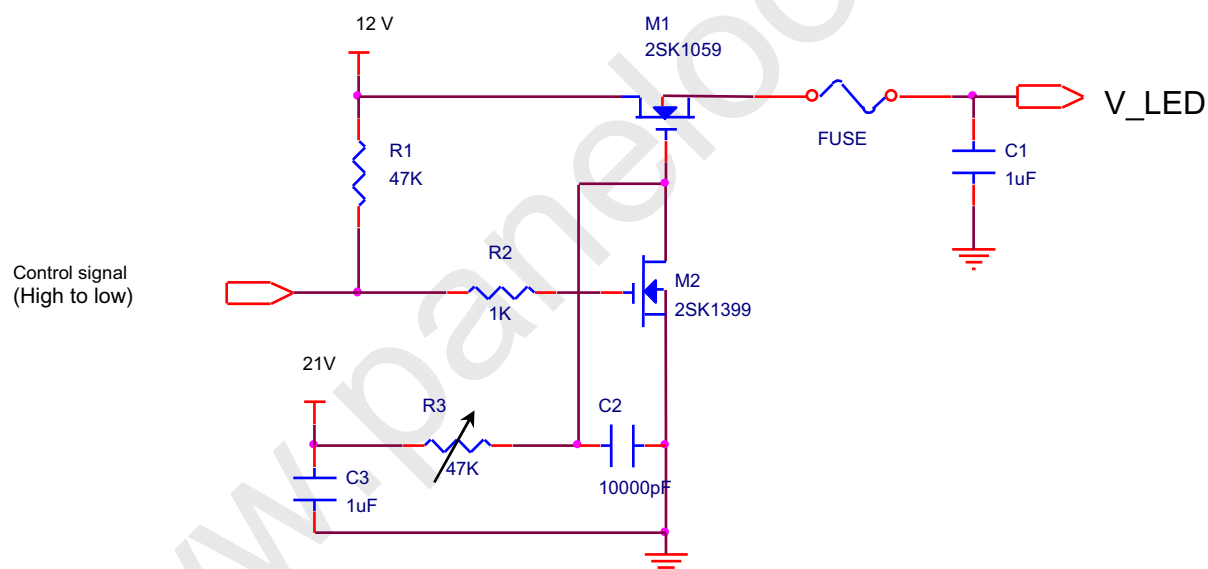


SPEC NO. BT140GW03 V.X

PAGE

11/26

## b. Power sequence

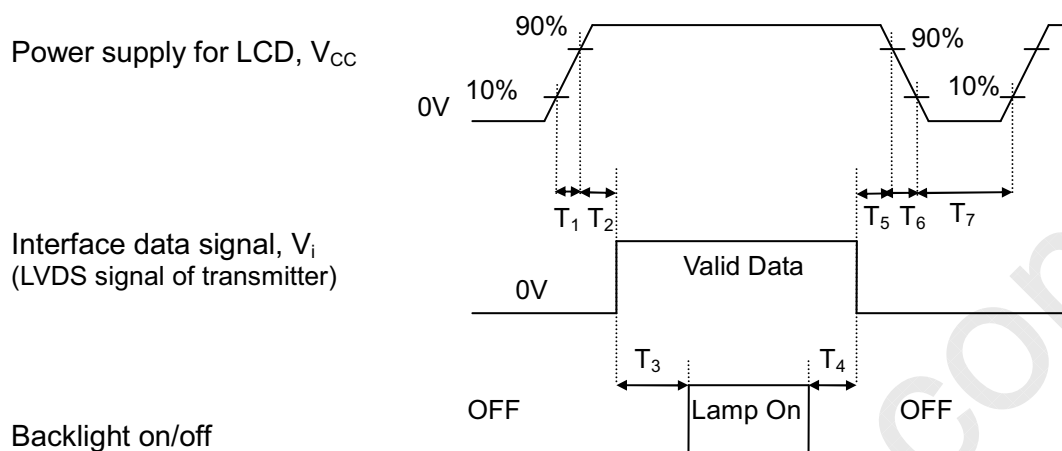

Power sequence timing table

Parameter	Value			Units
	Min.	Typ.	Max.	
$T_1$	0.5	-	10	ms
$T_2$	0	-	50	ms
$T_3$	200	-	-	ms
$T_4$	200	-	-	ms
$T_5$	0	-	50	ms
$T_6$	0.5	-	10	ms
$T_7$	400	-	-	ms


SPEC NO. BT140GW03 V.X

PAGE

12/26

## c. Display color vs. input data signals

Signal Name	Description	Remark
R5	Red Data 5 (MSB)	Red-pixel data. Each red pixel's brightness data consists of these 6 bits pixel data.
R4	Red Data 4	
R3	Red Data 3	
R2	Red Data 2	
R1	Red Data 1	
R0	Red Data 0 (LSB)	
	<b>Red-pixel Data</b>	
G5	Green Data 5 (MSB)	Green-pixel data. Each green pixel's brightness data consists of these 6 bits pixel data.
G4	Green Data 4	
G3	Green Data 3	
G2	Green Data 2	
G1	Green Data 1	
G0	Green Data 0 (LSB)	
	<b>Green-pixel Data</b>	
B5	Blue Data 5 (MSB)	Blue-pixel data. Each blue pixel's brightness data consists of these 6 bits pixel data.
B4	Blue Data 4	
B3	Blue Data 3	
B2	Blue Data 2	
B1	Blue Data 1	
B0	Blue Data 0 (LSB)	
	<b>Blue-pixel Data</b>	

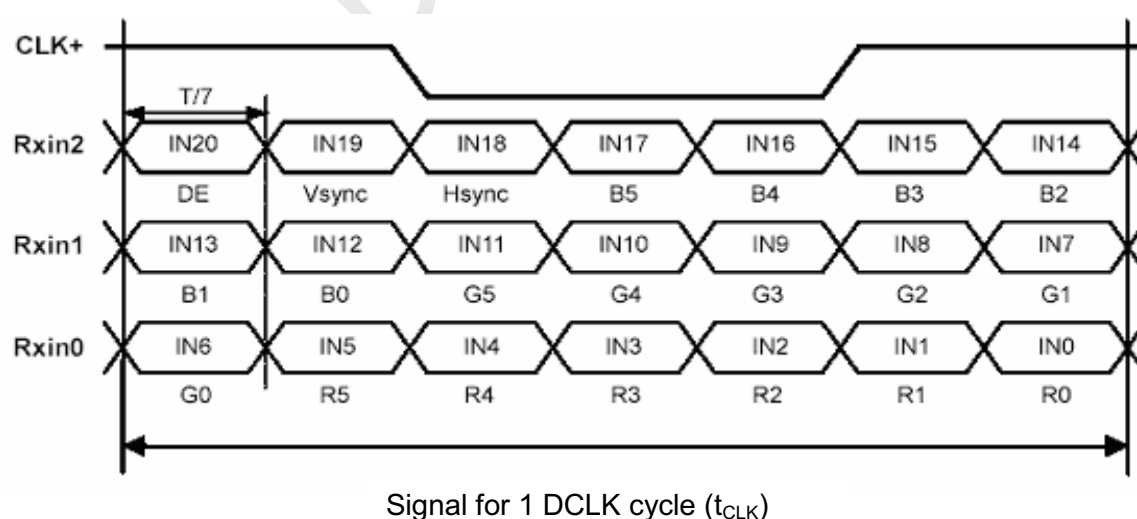

SPEC NO. BT140GW03 V.X


PAGE

13/26

## d. Input signal timing

Timing table

Description	Symbol	Min	Typ	Max	Unit
Frame rate	--	40	60	--	Hz
Clock freq.	$1/t_{CLK}$	45	71	85	MHz
Line cycle time	$t_H$	1400	1498	1800	$t_{CLK}$
Line width-active	$t_{Hd}$	1366	1366	1366	$t_{CLK}$
Frame cycle time	$t_V$	780	790	900	$t_H$
V width-active	$t_{Vd}$	768	768	768	$t_H$

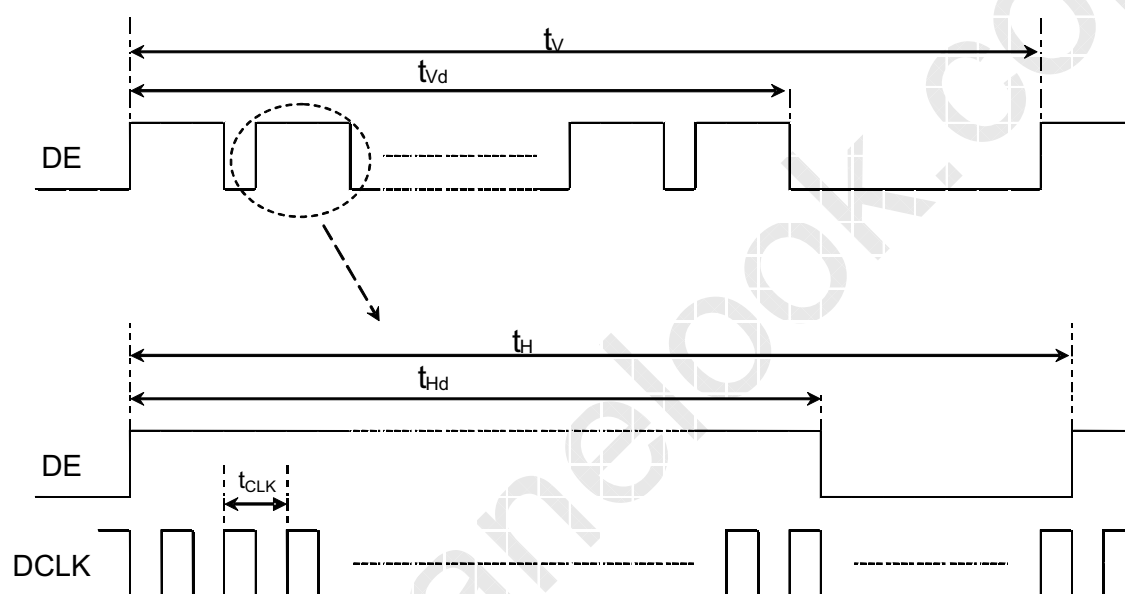

## e. Display position

D(1, 1)	D(2, 1)	.....	D(683, 1)	.....	D(1365, 1)	D(1366, 1)
D(1, 2)	D(2, 2)	.....	D(683, 2)	.....	D(1365, 2)	D(1366, 2)
⋮		.....	⋮	.....	⋮	⋮
D(1, 384)	D(2, 384)	.....	D(683, 384)	.....	D(1365, 384)	D(1366, 384)
⋮		.....	⋮	.....	⋮	⋮
D(1, 767)	D(2, 767)	.....	D(683, 767)	.....	D(1365, 767)	D(1366, 767)
D(1, 768)	D(2, 768)	.....	D(683, 768)	.....	D(1365, 768)	D(1366, 768)

SPEC NO. BT140GW03 V.X

PAGE

14/26


## f. Backlight driving conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
LED forward voltage	$V_F$	3.0	3.2	3.4	$V_{rms}$	$T = 25^{\circ}C$
LED forward current	$I_F$		20		$mA_{rms}$	$T = 25^{\circ}C$
Power consumption	$P_{LED}$			3	W	$T = 25^{\circ}C$
Input PWM frequency	$F_{PWM}$	190		2000	Hz	$T = 25^{\circ}C$
Duty ratio	-	5		100	%	Note 1
LED life time	-	15,000			Hr	$T = 25^{\circ}C$ , Note 2

Note 1: PWM duty cycle linearity guarantees 10~100%.

Note 2: LED life time definition is brightness decrease to 50% of initial or abnormal lighting.

## g. Module function block

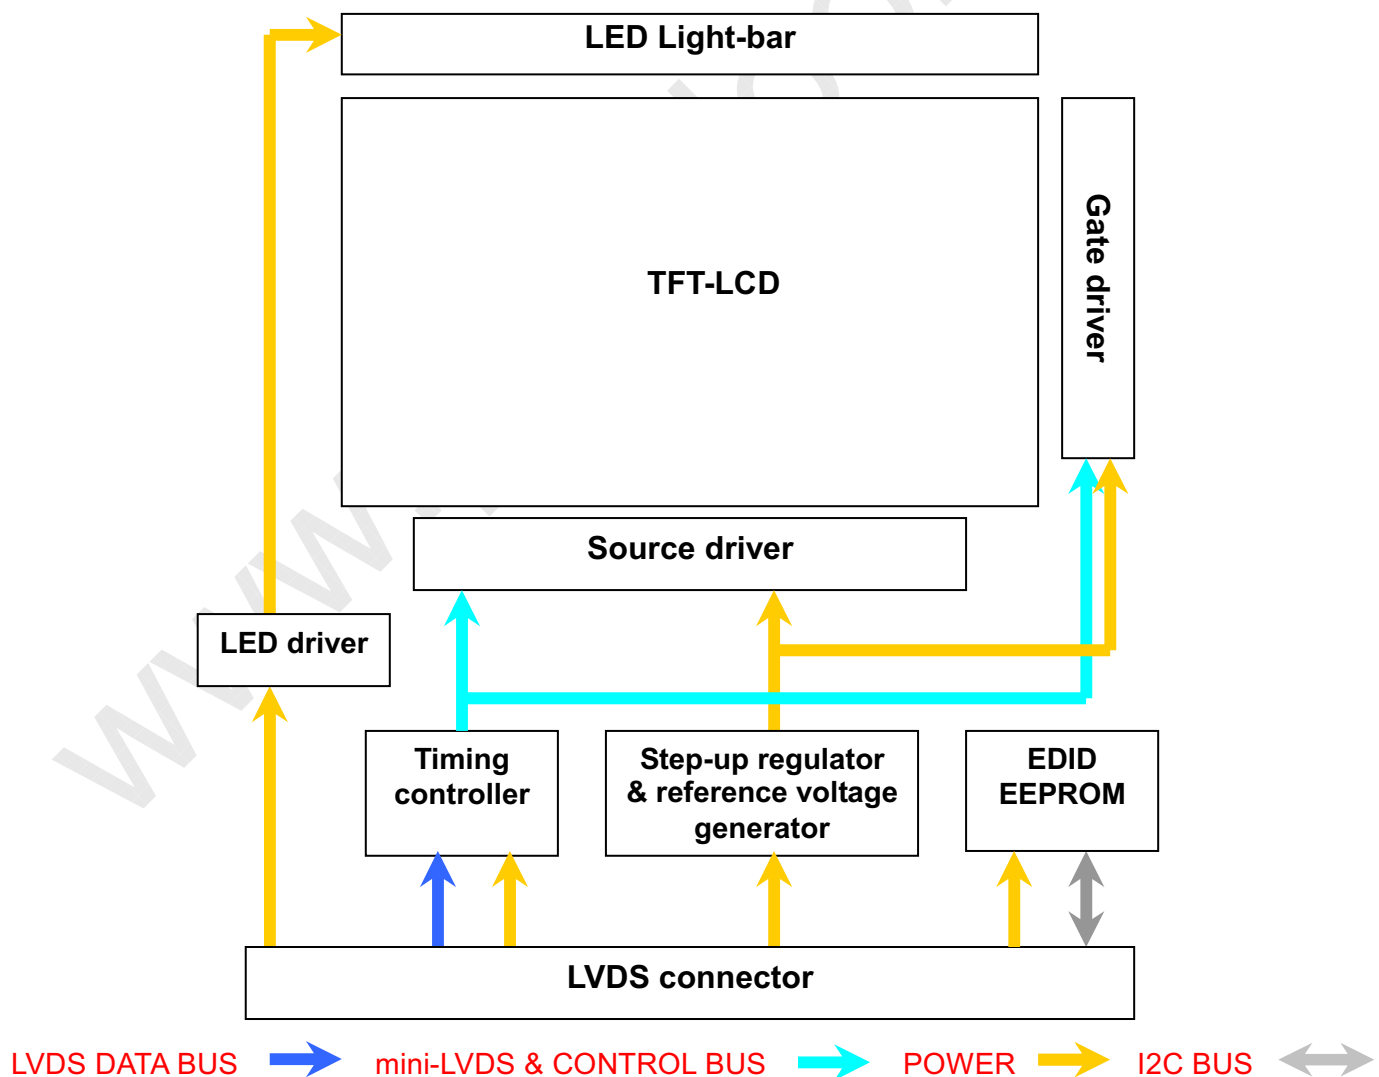



SPEC NO. BT140GW03 V.X

PAGE

15/26

### 3. Optical specifications

Ambient temperature = 25°C

Item	Symbol	Condition	Specification			Unit	Remark
			Min.	Typ.	Max.		
Response time	Tr+Tf	$\theta = 0^\circ$		8	16	ms	Note 3
Contrast ratio	CR	$\theta = 0^\circ$	500	600			Note 2,4
Viewing angle	Top	$CR \geq 10$	15			deg	Note 2,4,6
	Bottom	$CR \geq 10$	30				
	Left	$CR \geq 10$	40				
	Right	$CR \geq 10$	40				
Brightness (5 points average)	$Y_L$		(170)	200		nit	Note 2,5
Color chromaticity (CIE)	$W_x$	$\theta = 0^\circ$	-0.03	0.313	+0.03		Note 2
	$W_y$			0.329			
	$R_x$			0.58			
	$R_y$			0.34			
	$G_x$			0.31			
	$G_y$			0.55			
	$B_x$			0.155			
	$B_y$			0.155			
Color Gamut	NTSC	CIE1931		45		%	-
White uniformity	$\delta_{W(5)}$		0.8				Note 2,7
	$\delta_{W(13)}$		0.65				
Cross talk	Ct				2%		Note 8

Note 1: To be measured in dark room.

Note 2: To be measured with a viewing cone of 2° by Topcon luminance meter BM-5A.


Note 3: Definition of response time:

The output signals of BM-7 are measured when the input signals are changed from "Black" to "White" (falling time) and from "White" to "Black" (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Refer to figure as below.

SPEC NO. BT140GW03 V.X

PAGE

16/26

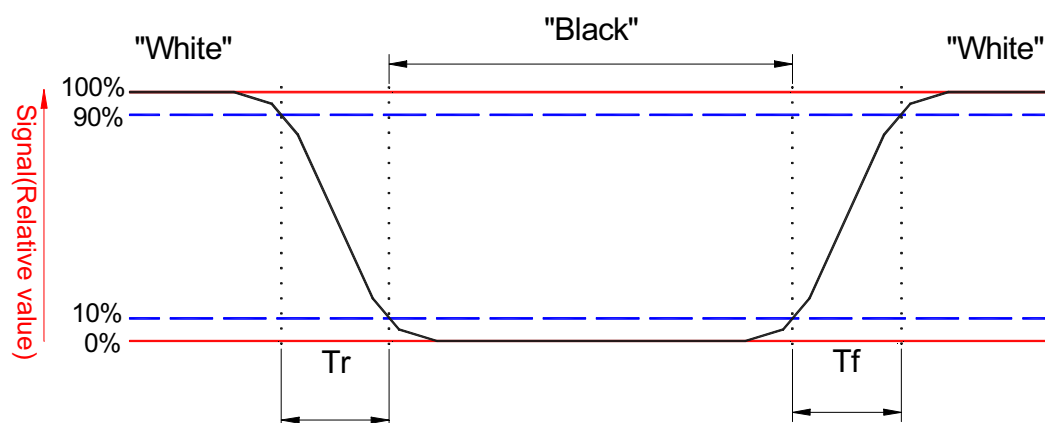

Note 4: Definition of contrast ratio:

Contrast ratio is calculated with the following formula:


$$\text{Contrast ratio (Avg of 5pts)} = \frac{L_{\text{white (Avg of 5pts.)}}}{L_{\text{Black (Avg of 5pts.)}}}$$

Note 5: Driving current for LED should be 20 mA.

Luminance is measured at the following thirteen points (1~13):

$$Y_L = (Y_5 + Y_{10} + Y_{11} + Y_{12} + Y_{13}) / 5$$

Note 6: Definition of viewing angle

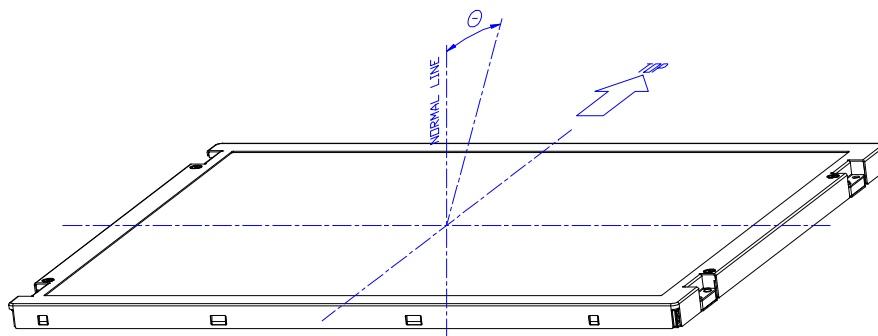

Note 7: Definition white uniformity

Luminance is measured at the following thirteen points (1~13):

$$\delta_{W(13)} = \frac{\text{Maximum brightness of thirteen points}}{\text{Minimum brightness of thirteen points}}$$

$$\delta_{W(5)} = \frac{\text{Maximum brightness of five points}}{\text{Minimum brightness of five points}}$$


SPEC NO. BT140GW03 V.X

PAGE


17/26

13 point measuring locations refer to the point 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12 and 13.

5 point measuring locations refer to the point 5, 10, 11, 12 and 13.

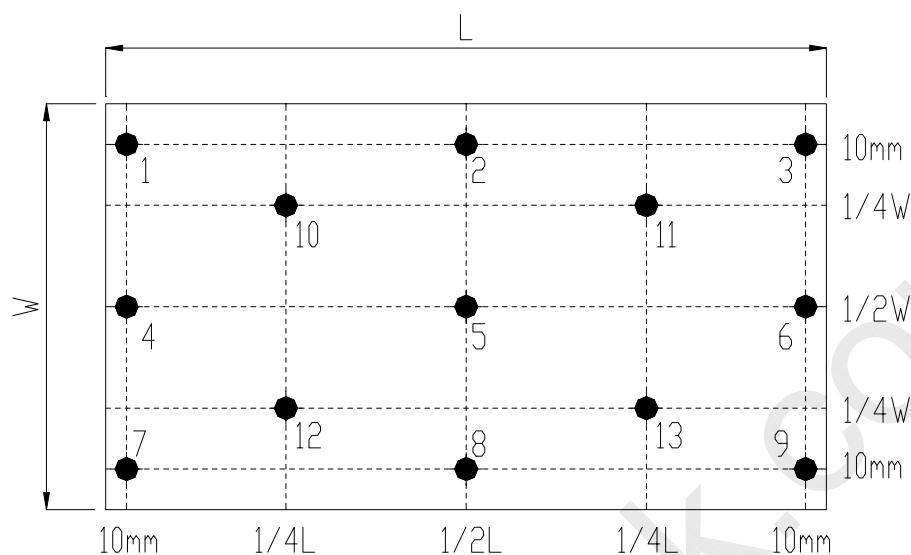

Note 8:

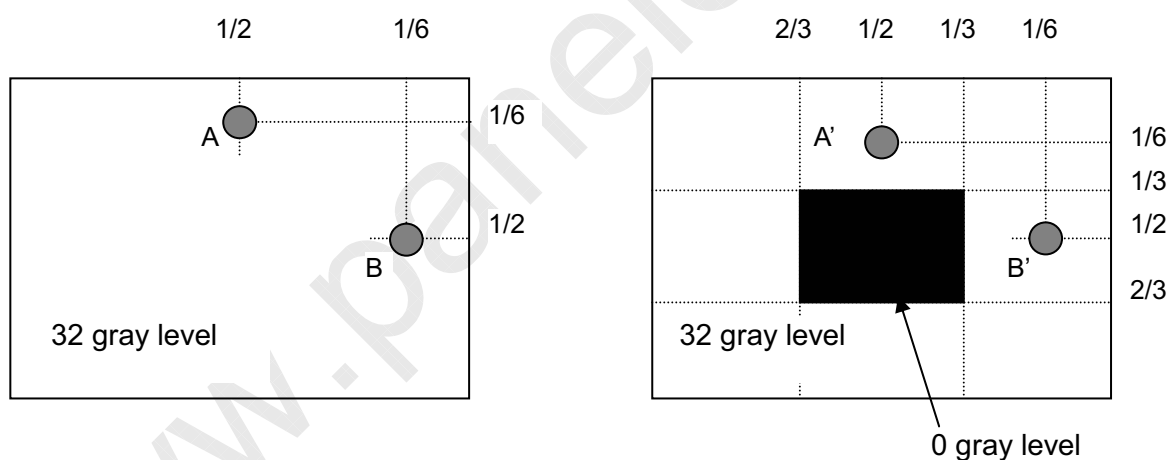

Unit: percentage of dimension of display area

$|L_A - L_{A'}| / L_A \times 100\% = 2\% \text{ max.}$ ,  $L_A$  and  $L_{A'}$  are brightness at location A and A'

$|L_B - L_{B'}| / L_B \times 100\% = 2\% \text{ max.}$ ,  $L_B$  and  $L_{B'}$  are brightness at location B and B'



SPEC NO. BT140GW03 V.X

PAGE

18/26

#### 4. Reliability test items

Test Item	Test Condition	Judgment	Remark
High temperature storage	60°C, 240 hours	Note 1	Note 2
Low temperature storage	-20°C, 240 hours	Note 1	Note 2
High temperature & high humidity operation	40°C, 90% RH, 240 hours (No condensation)	Note 1	Note 2
High temperature operation	50°C, 240 hours	Note 1	Note 2
Low temperature operation	0°C, 240 hours	Note 1	Note 2
Thermal Shock (Non-operation)	-25°C / 30 mins ~ 65°C / 30 mins 100 cycles	Note 1	Note 2
Electrostatic discharge (ESD)	150 pF, 330Ω, Contact: ±8kV, Air: ±15kV	Note 1	
Vibration (Non-operation)	1.5G, 10 to 500 Hz random; 0.5hr in each perpendicular axes ( X, Y, Z ).	Note 1	Note 2
Mechanical shock (Non-operation)	220G/2ms, Half sine wave, ±X, ±Y, ±Z one time for each direction	Note 1	Note 2

Note 1: Pass: Normal display image with no obvious non-uniformity and no line defect.

Fail: No display image, obvious non-uniformity, or line defects.

Partial transformation of the module parts should be ignored.

Note 2: Evaluation should be tested after storage at room temperature for more than one hour.



## 5. Safety

### 5-1. Sharp edge requirements

There will be no sharp edges or corners on the display assembly that could cause injury.

### 5-2. Materials

#### a. Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible InnoLux Toxicologist.

#### b. Flammability

All components including electrical components that do not meet the flammability grade UL94-V0 in the module will complete the flammability rating exception approval process. The printed circuit board will be made from material rated 94-V0 or better. The actual UL flammability rating will be printed on the printed circuit board.

#### c. Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

## 6. Display quality

The display quality of the color TFT-LCD module should be in compliance with the InnoLux incoming inspection standard.

## 7. Handling precaution

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) To assemble or install module into user's system can be only in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) It's not permitted to have pressure or impulse on the module because the LCD panel and backlight will be damaged.
- (4) Always follow the correct power sequence when LCD module is connecting and operating.
- (5) Do not pull the I/F connector in or out while the module is operating.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) It is dangerous that moisture come into or contacted the LCD module, because moisture may damage LCD module when it is operating.
- (9) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.


SPEC NO. BT140GW03 V.X

PAGE

20/26

## 8. Label Definition


### 8-1. Module label

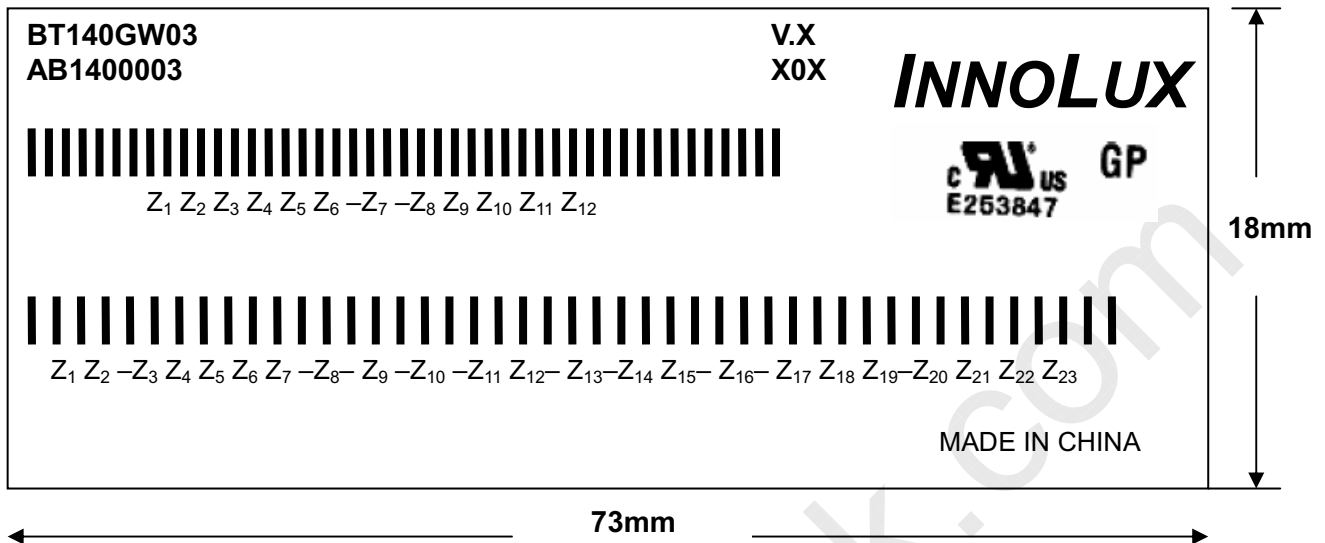

(1) Model Number : BT140GW03 V.X

(2) Product Number : AB1400003X0X

(3) Serial ID I : Z<sub>1</sub> Z<sub>2</sub> Z<sub>3</sub> Z<sub>4</sub> Z<sub>5</sub> Z<sub>6</sub> - Z<sub>7</sub> - Z<sub>8</sub> Z<sub>9</sub> Z<sub>10</sub> Z<sub>11</sub> Z<sub>12</sub>

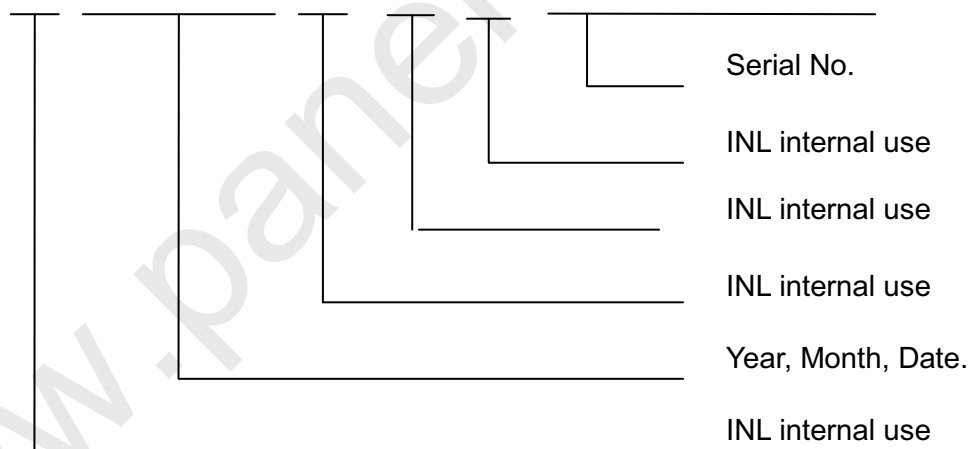

Serial ID includes the information as below:

Manufactured Date: Year: 0~9, for 2000~2009

Month: 1~9 & A~C for Jan.~Dec.

Date: 1~9 & A~Z (exclude I, O, Q, U) for 1th~31th

Serial No.: Module manufacture sequential number.




SPEC NO. BT140GW03 V.X


PAGE

21/26

## 8-1. Carton label

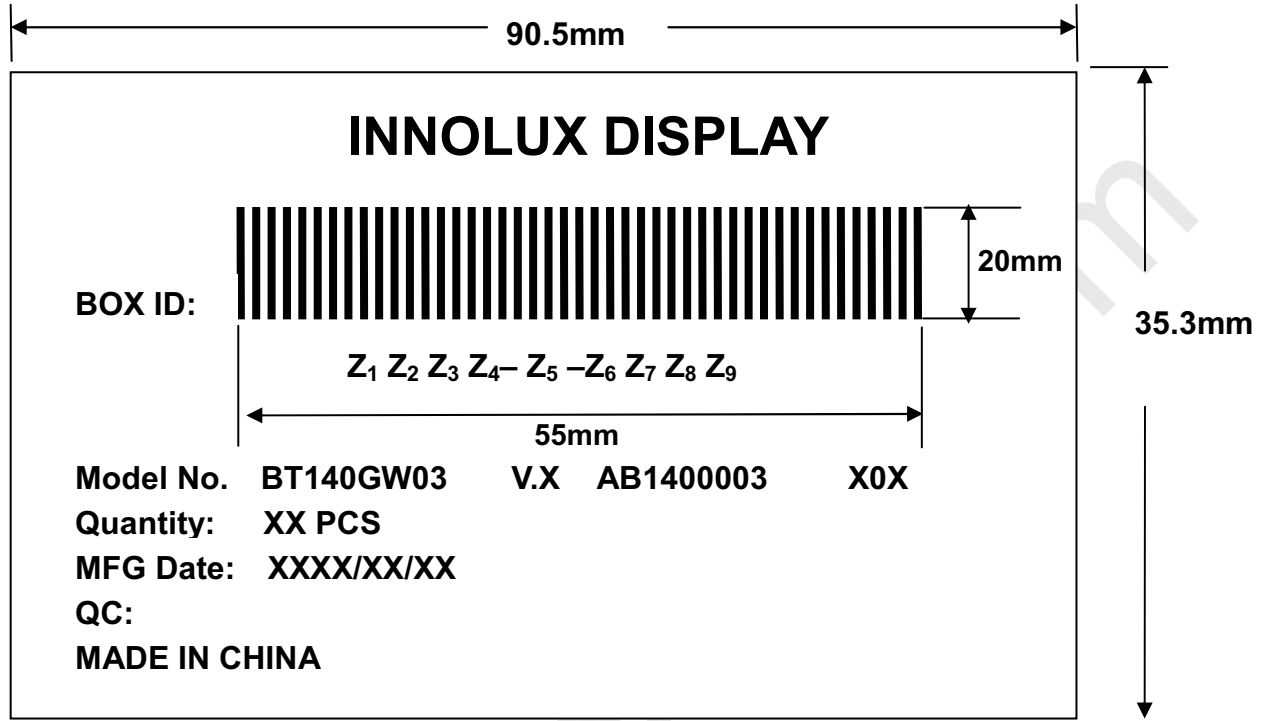

- (1) Model No. : BT140GW03
- (2) Version: V.X
- (3) Package Quantity: XX PCS
- (4) MFG Date: Year/Month/Date
- (5) Serial ID :

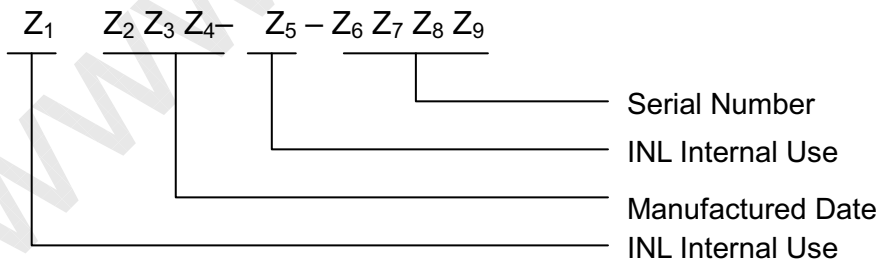

SPEC NO. BT140GW03 V.X

PAGE


22/26

## 9. Packing Form


↓ Step A  
LCM




PET Tray

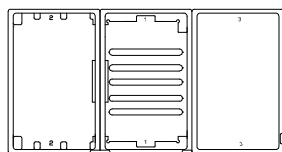

↓ Step B  
Put LCM-1 into PET Tray

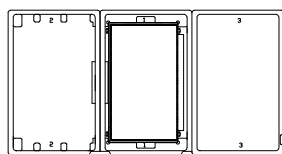


↓ Step C  
Turn back PET Tray And  
Put LCM-2 into PET Tray




↓ Step D

Turn back the PET Tray




Step E

Put LCM with PET Tray into carton




↓ Step F



upper cushion(1PCS)


LCM(26PCS)

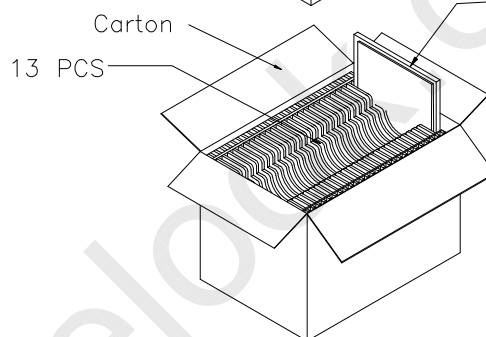

Carton


13 PCS

↓ Step G

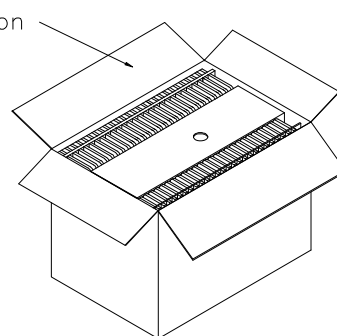


Carton

↓ Step H

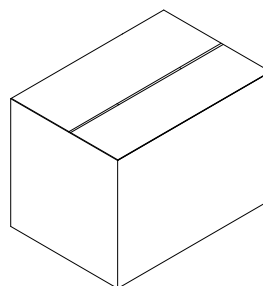

## 10. Mechanical Drawings

### 10-1 Front Side

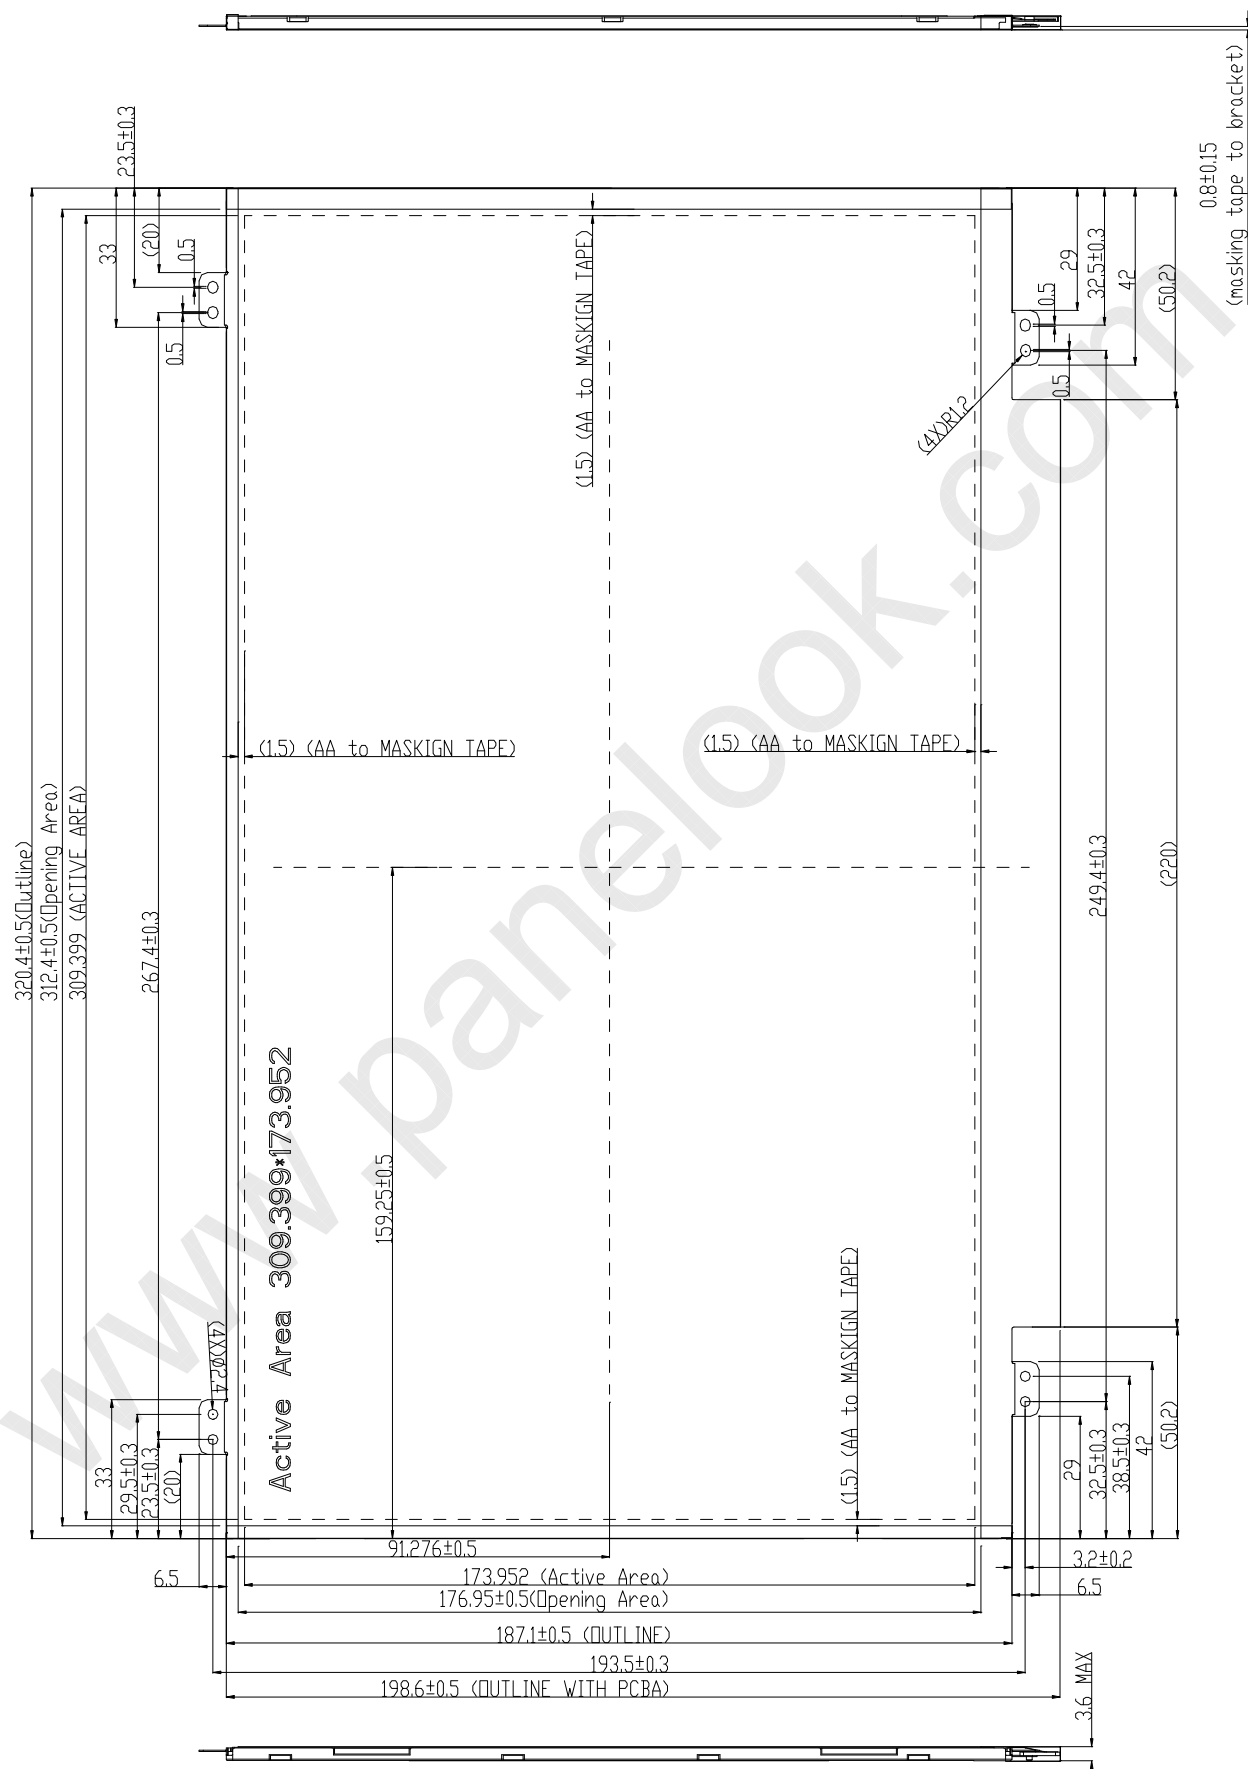

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS DOCUMENT SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM Chimei-Innolux




SPEC NO. BT140GW03 V.X

PAGE

24/26

## 10-2 Rear side

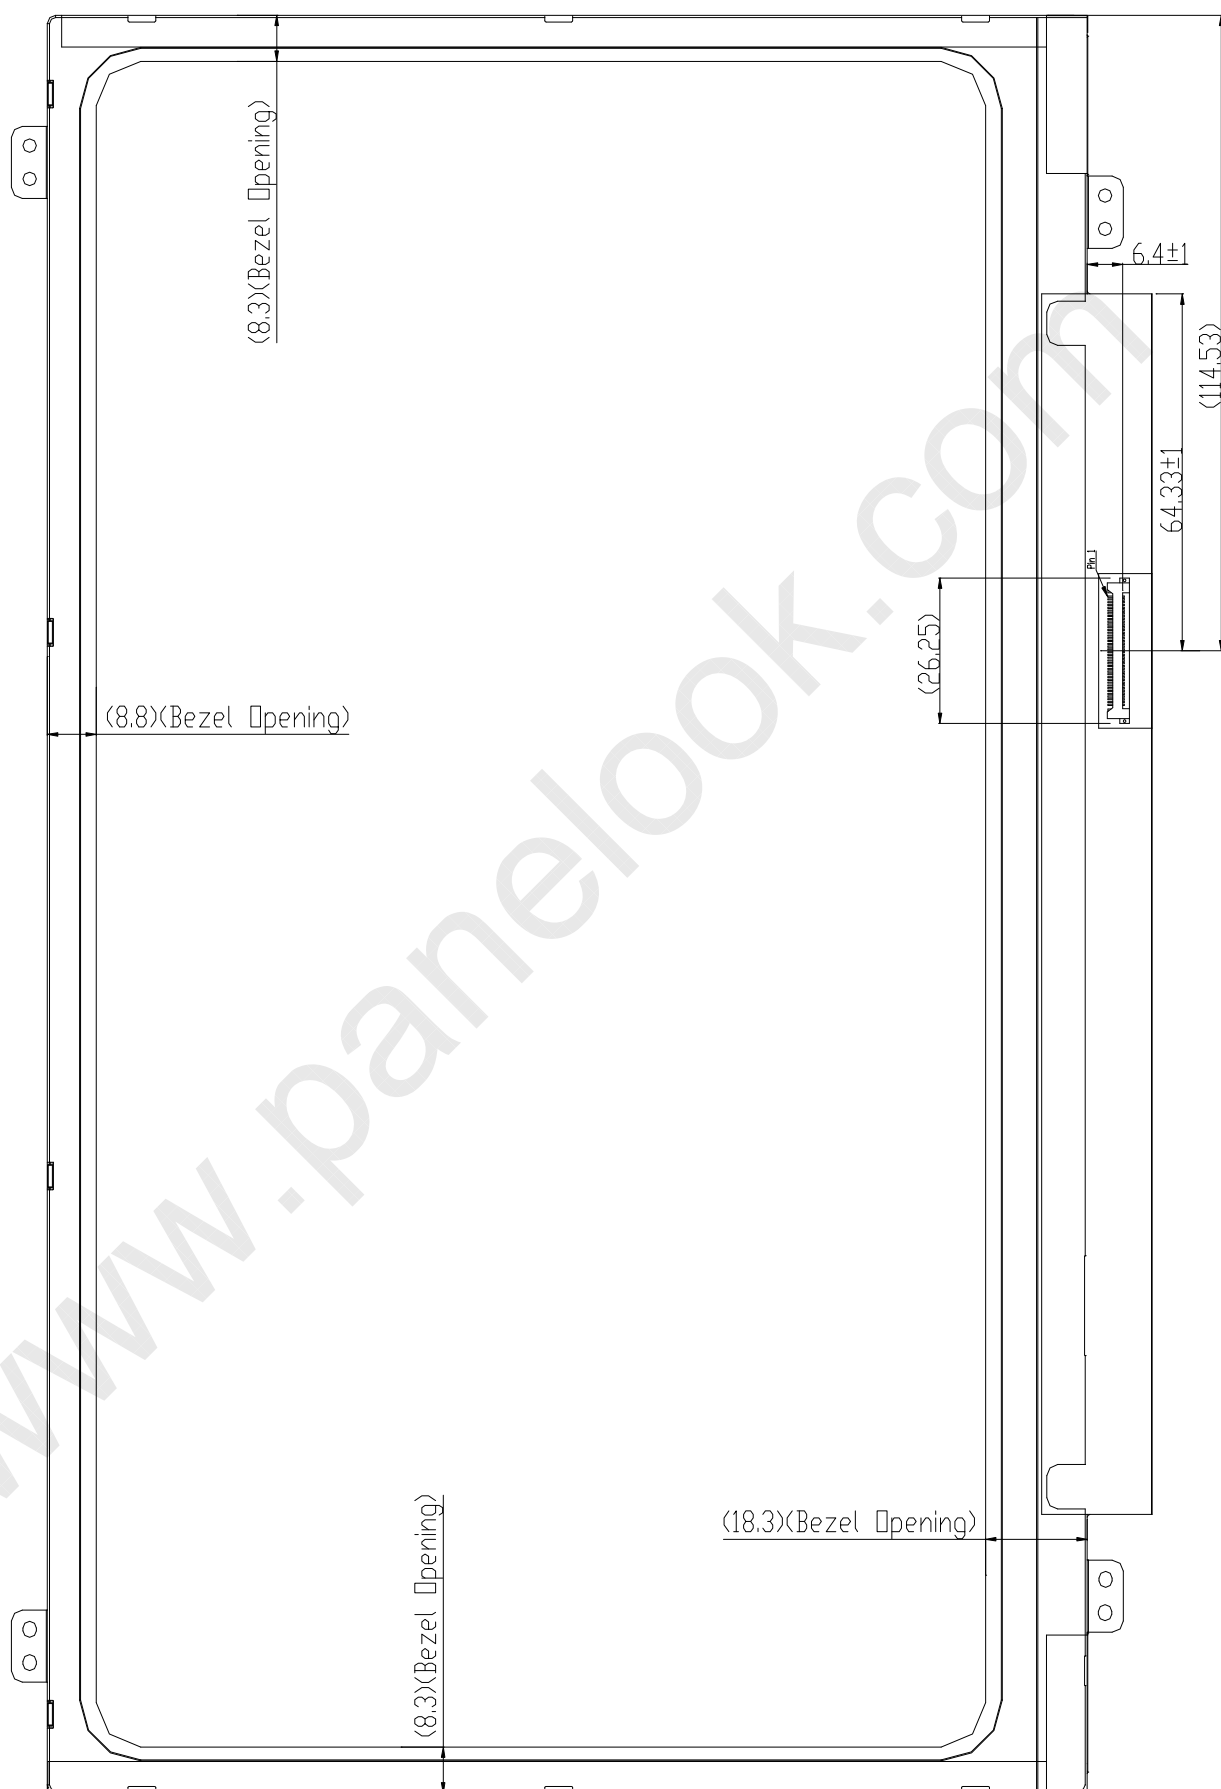

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS DOCUMENT SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM Chimei-Innolux



SPEC NO. BT140GW03 V.X

PAGE

25/26

**Appendix: EDID Code**

	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
<b>Header</b>	00	Header	00	00000000
	01	Header	FF	11111111
	02	Header	FF	11111111
	03	Header	FF	11111111
	04	Header	FF	11111111
	05	Header	FF	11111111
	06	Header	FF	11111111
	07	Header	00	00000000
<b>Vendor / Product EDID Version</b>	08	EISA manufacture code ( 3 Character ID ) " INL "	25	00100101
	09	EISA manufacture code (Compressed ASC II )	CC	11001100
	0A	Panel Supplier Reserved - Product Code "00"	00	00000000
	0B	( Hex. LSB first )	00	00000000
	0C	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	0D	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	0E	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	0F	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	10	Week of Manufacture 00 weeks	00	00000000
	11	Year of Manufacture 2010 years	14	00010100
	12	EDID structure version # = 1	01	00000001
	13	EDID revision # = 3	03	00000011
	14	Video input Definition = Digital signal	80	10000000
<b>Display Parameters</b>	15	Max H image size (Rounded cm) = 31 cm	1F	00011111
	16	Max V image size (Rounded cm) = 18 cm	12	00010010
	17	Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
	18	Feature Support (no_DPMS, no_Active Off/Very Low Power, RGB color display, Timing BLK 1,no_GTF)	0A	00001010
	19	Red/Green Low Bits (RxRy/GxGy)	87	10000111
<b>Panel Color Coordinates</b>	1A	Blue/White Low Bits (BxBY/WxWy)	F5	11110101
	1B	Red X Rx = 0.580	94	10010100
	1C	Red Y Ry = 0.340	57	01010111
	1D	Green X Gx = 0.310	4F	01001111
	1E	Green Y Gy = 0.550	8C	10001100
	1F	Blue X Bx = 0.155	27	00100111
	20	Blue Y By = 0.155	27	00100111
	21	White X Wx = 0.313	50	01010000
	22	White Y Wy = 0.329	54	01010100

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS DOCUMENT SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM Chimei-Innolux



SPEC NO. BT140GW03 V.X

PAGE

26/26

<b>Established Timings</b>	<b>23</b>	Established timing 1 (00h if not used)	<b>00</b>	00000000
	<b>24</b>	Established timing 2 (00h if not used)	<b>00</b>	00000000
	<b>25</b>	Manufacturer's timings (00h if not used)	<b>00</b>	00000000
<b>Standard Timing ID</b>	<b>26</b>	Standard timing ID1 (01h if not used)	<b>01</b>	00000001
	<b>27</b>	Standard timing ID1 (01h if not used)	<b>01</b>	00000001
	<b>28</b>	Standard timing ID2 (01h if not used)	<b>01</b>	00000001
	<b>29</b>	Standard timing ID2 (01h if not used)	<b>01</b>	00000001
	<b>2A</b>	Standard timing ID3 (01h if not used)	<b>01</b>	00000001
	<b>2B</b>	Standard timing ID3 (01h if not used)	<b>01</b>	00000001
	<b>2C</b>	Standard timing ID4 (01h if not used)	<b>01</b>	00000001
	<b>2D</b>	Standard timing ID4 (01h if not used)	<b>01</b>	00000001
	<b>2E</b>	Standard timing ID5 (01h if not used)	<b>01</b>	00000001
	<b>2F</b>	Standard timing ID5 (01h if not used)	<b>01</b>	00000001
	<b>30</b>	Standard timing ID6 (01h if not used)	<b>01</b>	00000001
	<b>31</b>	Standard timing ID6 (01h if not used)	<b>01</b>	00000001
	<b>32</b>	Standard timing ID7 (01h if not used)	<b>01</b>	00000001
	<b>33</b>	Standard timing ID7 (01h if not used)	<b>01</b>	00000001
	<b>34</b>	Standard timing ID8 (01h if not used)	<b>01</b>	00000001
	<b>35</b>	Standard timing ID8 (01h if not used)	<b>01</b>	00000001
<b>Timing Descriptor #1</b>	<b>36</b>	Pixel Clock/10,000 (LSB) 71 MHz @ 60Hz	<b>BC</b>	10111100
	<b>37</b>	Pixel Clock/10,000 (MSB)	<b>1B</b>	00011011
	<b>38</b>	Horizontal Active (lower 8 bits) 1366 Pixels	<b>56</b>	01010110
	<b>39</b>	Horizontal Blanking(Thp-HA) (lower 8 bits) 132 Pixels	<b>84</b>	10000100
	<b>3A</b>	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	<b>50</b>	01010000
	<b>3B</b>	Vertical Active 768 Lines	<b>00</b>	00000000
	<b>3C</b>	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 22 Lines	<b>16</b>	00010110
	<b>3D</b>	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	<b>30</b>	00110000
	<b>3E</b>	Horizontal Sync. Offset (Thfp) 48 Pixels	<b>30</b>	00110000
	<b>3F</b>	Horizontal Sync Pulse Width (HSPW) 32 Pixels	<b>20</b>	00100000
	<b>40</b>	Vertical Sync Offset(Tvfp) : Sync Width (VSPW) 1 Lines : 4 Lines	<b>14</b>	00010100
	<b>41</b>	Horizontal Vertical Sync Offset/Width (upper 2bits)	<b>00</b>	00000000
	<b>42</b>	Horizontal Image Size (mm) 309 mm	<b>35</b>	00110101
	<b>43</b>	Vertical Image Size (mm) 174 mm	<b>AE</b>	10101110
	<b>44</b>	Horizontal Image Size / Vertical Image Size	<b>10</b>	00010000
	<b>45</b>	Horizontal Border = 0 (Zero for Notebook LCD)	<b>00</b>	00000000
	<b>46</b>	Vertical Border = 0 (Zero for Notebook LCD)	<b>00</b>	00000000
	<b>47</b>	Non-Interlace, Normal display, no stereo, Digital Separate ( Vsync_NEG, Hsync_NEG ), DE only note : LSB is set to '1' if panel is DE-timing only. H/V can be ignored.	<b>18</b>	00011000

ALL RIGHTS STRICTLY RESERVED. ANY PORTION OF THIS DOCUMENT SHALL NOT BE REPRODUCED, COPIED, OR TRANSFORMED TO ANY OTHER FORMS WITHOUT PERMISSION FROM Chimei-Innolux



SPEC NO. BT140GW03 V.X

PAGE

27/26

Timing Descriptor #2	48	Flag	00	00000000
	49	Flag	00	00000000
	4A	Flag	00	00000000
	4B	Data Type Tag (Descriptor Defined by manufacturer )	00	00000000
	4C	Flag	00	00000000
	4D	Descriptor Defined by manufacturer	0A	00001010
	4E	Descriptor Defined by manufacturer	20	00100000
	4F	Descriptor Defined by manufacturer	20	00100000
	50	Descriptor Defined by manufacturer	20	00100000
	51	Descriptor Defined by manufacturer	20	00100000
	52	Descriptor Defined by manufacturer	20	00100000
	53	Descriptor Defined by manufacturer	20	00100000
	54	Descriptor Defined by manufacturer	20	00100000
	55	Descriptor Defined by manufacturer	20	00100000
	56	Descriptor Defined by manufacturer	20	00100000
	57	Descriptor Defined by manufacturer	20	00100000
	58	Descriptor Defined by manufacturer	20	00100000
	59	Descriptor Defined by manufacturer	20	00100000
Timing Descriptor #3	5A	Flag	00	00000000
	5B	Flag	00	00000000
	5C	Flag	00	00000000
	5D	Data Type Tag ( ASCII String )	FE	11111110
	5E	Flag	00	00000000
	5F	ASCII String "I"	49	01001001
	60	ASCII String "N"	4E	01001110
	61	ASCII String "L"	4C	01001100
	62	ASCII String	0A	00001010
	63	ASCII String	20	00100000
	64	ASCII String	20	00100000
	65	ASCII String	20	00100000
	66	ASCII String	20	00100000
	67	ASCII String	20	00100000
	68	ASCII String	20	00100000
	69	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000
	6A	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000
	6B	Manufacturer P/N(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000



SPEC NO. BT140GW03 V.X

PAGE

28/26

Timing Descriptor #4	6C	Flag	00	00000000
	6D	Flag	00	00000000
	6E	Flag	00	00000000
	6F	Data Type Tag ( Monitor Name, stored as ASCII )	FC	11111100
	70	Flag	00	00000000
	71	Monitor Name, stored as ASCII "B"	42	01000010
	72	Monitor Name, stored as ASCII "T"	54	01010100
	73	Monitor Name, stored as ASCII "1"	31	00110001
	74	Monitor Name, stored as ASCII "4"	34	00110100
	75	Monitor Name, stored as ASCII "0"	30	00110000
	76	Monitor Name, stored as ASCII "G"	47	01000111
	77	Monitor Name, stored as ASCII "W"	57	01010111
	78	Monitor Name, stored as ASCII "0"	30	00110000
	79	Monitor Name, stored as ASCII "3"	33	00110011
	7A	Monitor Name, stored as ASCII "V"	56	01010110
	7B	Monitor Name, stored as ASCII "4"	34	00110100
	7C	Monitor Name, stored as ASCII	0A	00001010
	7D	Monitor Name, stored as ASCII	20	00100000
Checksum	7E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	7F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	5F	01011111